



Offered by
LASER LAB SOURCE

manufactured by  **RealLight**

1064nm Narrow Line Width Butterfly Laser Diode 800mW Output Power, 105 μ m Fiber Coupled



RLS / 1064NM-800MW-RL

- o Butterfly Package Laser Diode
- o Narrow Line Width < 0.1nm
- o 105 μ m Fiber-Coupled, FC/PC Connector
SMA905 Connector Optional
- o Industry-Standard Type-1 Pinout



**LASER
DIODE
SOURCES**



BUTTERFLY LASER DIODE

These multimode butterfly-packaged lasers deliver high power, narrow line width laser light due to the internal volume Bragg grating.


RELIABLE PERFORMANCE IN A STANDARD LASER PACKAGE

These laser diodes are offered in an industry standard 14-pin butterfly package with a 105µm multi-mode fiber pigtail, terminated with an FC/PC connector.

The laser package integrates a thermo-electric cooler with 10 kΩ thermistor, and an internal monitor photodiode.

The pinout is industry-standard Type-1 pinout. The package is electrically floating relative to ground, offering flexibility in mounting and control of the laser.

DIMENSIONS AND PINOUT

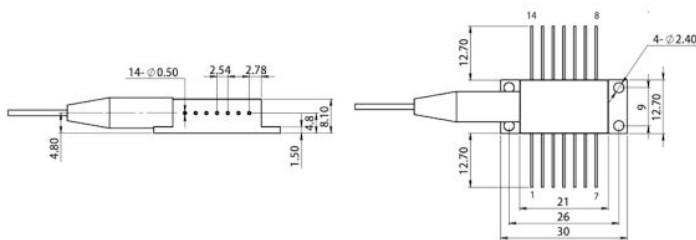

| Pin | Function | Pin | Function |
|-----|------------|-----|---------------------|
| 1 | TEC (+) | 14 | TEC (-) |
| 2 | Thermistor | 13 | - |
| 3 | PD Anode | 12 | - |
| 4 | PD Cathode | 11 | Laser Diode Cathode |
| 5 | Thermistor | 10 | Laser Diode Anode |
| 6 | - | 9 | - |
| 7 | - | 8 | - |

SPECIFICATIONS

LASER SPECIFICATIONS

- CW Output Power: 800 mW
- Center Wavelength: 1064 nm (±0.5 nm)
- Spectral Width: < 0.1 nm
- Temperature Tuning Coefficient: 0.01 nm/°C
- Current Tuning Coefficient: 0.05 nm/A

FIBER AND CONNECTOR

- Fiber Core Diameter: 105 µm
- Fiber Cladding Diameter: 125 µm
- Fiber Coating Diameter: 250 µm
- Numerical Aperture: 0.22 NA
- Connector: FC/PC or SMA905 (specify @ time of order)
- Fiber Length: 100 cm ±10 cm

ELECTRICAL SPECIFICATIONS

- Threshold Current: 0.2 A
- Operating Current: 1.5 A
- Operating Voltage: 1.8 V
- TEC max Current: 2.5 A
- TEC max Voltage: 6.3 V
- Monitor Photodiode Range: 2000 µA
- Thermistor: 10 (±5%) kΩ (@25°C)
- Slope Efficiency: 0.6 W/A

GENERAL SPECIFICATIONS

- Operating Temperature Range: 10°C – 30°C
- Storage Temperature Range: -20°C – 70°C
- Max Operating Humidity, Relative: 75 %
- Max Storage Humidity, Relative: 90 %
- Lead Soldering Temp: 250°C max, 10 sec

PRIMARY APPLICATIONS

- Raman Spectroscopy
- Analytical Instruments
- Biological Research



Offered by
LASER LAB SOURCE



**LASER
DIODE
SOURCES**

PRODUCT SALES AND SERVICE:

Unlimited phone and email support is provided for products purchased through Laser Lab Source. Orders for this product are fulfilled by Laser Lab Source in North America and select international regions. It is manufactured by Real-Light, Beijing.

PRODUCT WARRANTY:

This product is sold with a full one-year warranty. It is warranted to be free from defects in material and/or workmanship for a period of one year from the date of shipment.



Laser Lab Source, a division of Research Lab Source, Inc.
670 S. Ferguson St., Suite 3
Bozeman, MT 59718 USA

Phone: 406-219-1472

www.LaserLabSource.com



5th floor Block F No.1 Building
No.139 Jinghai 3rd Road
Beijing Development Area
Beijing, China