

CoBrite CBMA24

24-Channel Continuously Tunable Laser Source



*This product is sold
and supported
in the USA by*



LASER LAB SOURCE
marketplace for **Scientists & Engineers**

contact@LaserLabSource.com

800.877.5065

Optical Specifications

Optical Parameter	Laser Type N	Laser Type S	Laser Type G	Unit
Frequency range; C – Band	190.70 – 196.65 (1524.5 - 1572nm)	191.12 – 196.25 (1527.6 – 1568.6nm)	191.1 – 196.25 (1527.61 – 1568.77nm)	THz
L – Band	186.00 – 191.1 (1568.8 – 1611.7nm)	Not available	Not available	
Channel Spacing	Continuous	Continuous	Continuous	GHz
Frequency fine tune resolution	1	10	1	MHz
Frequency fine tune range	+/- 6	+/- 10	+/- 6	GHz
Optical Power tuning range for any frequency	C Band: 10.0 – 16.0 L Band: 9.0 – 14.5	8.8 – 17.8 (17.0 dBm EOL) –	9.5 – 15.5 –	dBm
Spectral Line width; 3dB instantaneous, 3.5us (Lorentzian contribution)	< 100 25 typical	80 typical < 100 (Pout < 16dBm) < 150	< 100 25 typical	kHz
Frequency accuracy over Lifetime Over 24 hours	+/- 2.5 0.3	+/- 1.5 0.3	+/- 2.5 0.3	GHz
SMSR; Side mode suppression ratio; measured with 0.1nm RBW	> 40 55 typical	> 40	> 40 55 typical	dB
RIN (10MHz to 3GHz)	-145 (10 MHz to 44GHz, 7dBm)	-140 (100kHz – 20MHz) -150 (20MHz – 1GHz)	-145 (10 MHz to 44GHz, 7dBm)	dB/Hz
Power accuracy over tuning range	+/- 0.5	+/- 0.5	+/- 0.5	dB
Tuning speed (max/typical)	15 / 10	2 / 1.0	15 / 10	s
Output Connector	FC/APC, FC/PC or SC/PC			
Output power accuracy over Lifetime Over 1 hour Over 24 hours		-/+1 +/- 0.01 (typ.) +/- 0.03 (typ.)		dB
Output power setting resolution		0.1		dB
Optical Fiber	Polarization- maintaining PANDA type Fiber, PER > 18dB, 25typ.			

Inquire for customized parameters

Ordering Information

CBMX -XY-XY-XY-XY -XX

Article	Variant	Connector
<i>CoBrite</i> _{MX}	X: Laser Type (N,S,G*) Y: Laser Band - (C, L) band XY = NN : No laser equipped 2 or 4 laser ports only	FA = FC/APC FP = FC/PC SP = SC/PC

Contact information

ID Photonics GmbH
Anton-Bruckner-Str. 6
85579 Neubiberg
GERMANY
Tel.: + 49 (0) 89 – 201 899 16
info@id-photonics.com
www.id-photonics.com

Invisible Laser Radiation
Class 1M Laser Product
EN 60825-1: IEC 60825-1

* APC type connector only

Mainframe Series for *CoBrite* Laser

Features

- ✓ 19" rack mountable chassis platform
 - ✓ 2 Different chassis variants to scale with your needs
 - ✓ Each available with handles or rack mounting brackets
- ✓ Swappable cards & central controller
- ✓ Scales from 2 to 48 Laser sources per frame
- ✓ 4 lasers per card; ultra high density
- ✓ 3 different Laser types to match your need; mix within one system
- ✓ Installation free, browser based pictographic GUI
- ✓ Remote control
 - ✓ USB & Ethernet connectivity
 - ✓ SCPI Style commands

Applications

- ✓ generation of channel grids for DWDM transport testing
 - ✓ flexible grid testing
- ✓ ready for data rates 100G+
- ✓ Coherent Transmission
 - ✓ Local Oscillator
 - ✓ Transmitter Laser
- ✓ Versatile Light Source



This series of mainframes host our CoBrite MX tunable laser modules. All variants can be equipped with handles and rubber feet for bench-top use or brackets for 19inch rack mount usage.

Remote operation via an integrated web server allows control using any browser-based device such as smartphones eliminating the need for complex software installations.

Automated remote control is achieved via USB or Ethernet by SCPI command control. It empowers users to setup and perform complex automated tasks within minutes.

CBMA24


This mainframe is designed for low to medium channel counts and hosts up to 6 cards that allows to for up to 24 lasers in a compact chassis.

CBMA48

Is the core mainframe for demanding applications as it hosts up to 12 cards with 48 lasers. For applications requiring more than 48 laser ports, extensions via multiple CBMA48 chassis is possible.

Mainframe Chassis Specifications

Parameter	CBMA24	CBMA48
Module Capacity	6	12
Ports	1x Ethernet back, 1x Ethernet front, 1x USB front	
Control & Automation	Installation free, browser based pictographic GUI, SCPI style commands	
Operating Temperature	0 to 40°C, non-condensing	
Storage Temperature	-20°C to 60°C, non-condensing	
Dimensions (W x H x D)	345 x 152 x 380mm (13 x 6 x 15 inch)	482 x 152 x 540mm (19 x 6 x 21 inch)
Laser Safety Interlock	Key located in front, Software based interlock	
Power Supply	100-240 VAC, 50/60Hz, 10A	

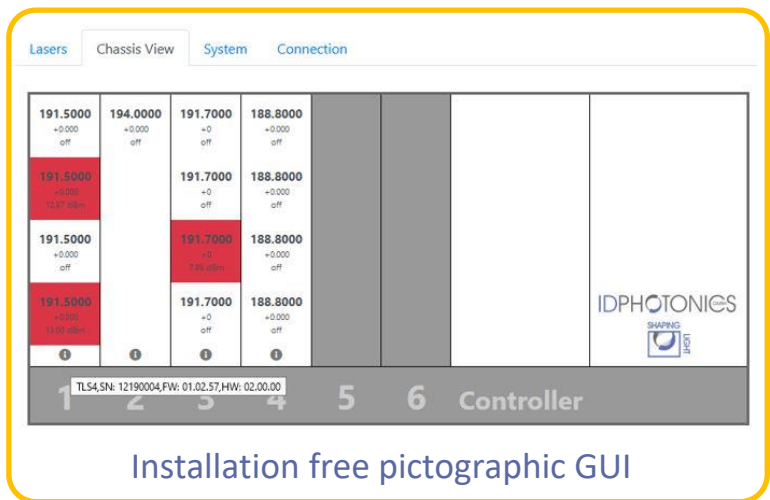

Invisible Laser Radiation
Class 1M Laser Product
EN 60825-1: IEC 60825-1

Ordering Information – Mainframe Chassis

CB	-XXXX
Article	Variant
CoBrite	MA24
Chassis	MA48

Contact information

ID Photonics GmbH
Anton-Bruckner-Str. 6
85579 Neubiberg
GERMANY
Tel.: + 49 (0) 89 – 201 899 16

info@id-photonics.com
www.id-photonics.com

CoBrite – Tunable Laser Series

Features

- ✓ Versatile CW Laser Light source
- ✓ Tune to any Frequency within specified range
- ✓ Ultra compact; 4 laser per card
- ✓ Polarization Maintaining Fiber
- ✓ Local On/off switch at each port
- ✓ FC/ APC, FC/PC or SC/PC connector type



Choose from 3 Laser types

Narrow Linewidth (N – type)

- ✓ Typical Line width < 25kHz
- ✓ Output power tunable up to 16dBm
- ✓ Ultra wide frequency tuning range
- ✓ C and L Band versions available
- ✓ Customizable on request

Standard Linewidth (S – type)

- ✓ Typical Line width 80kHz
- ✓ Output power tunable up to 17.8dBm
- ✓ Fast tuning: 1 Second typical
- ✓ Low frequency noise
- ✓ Cost efficient coherent transmission

Generic Light source (G – type)

- ✓ General purpose tunable laser with standard tuning range, 100kHz Linewidth

Our **CoBrite_{MX}** tunable Laser modules offer full **continuous** tuneability over C- or L-band utilizing 3 different laser types to meet any application from ultra narrow linewidth coherent transmission to DWDM comb generation.

The laser types can be mixed within a single mainframe chassis.

Its Polarization maintaining output with up to 17.8dBm of output power makes it an ideal source for emulation of DWDM channels by external modulation.

CoBrite_{MX} tunable laser modules are hosted in a variety of mainframes that scale from 4 Lasers up to 104 laser sources in one system to match your application.

