

520nm Single Mode Fiber-Coupled Laser Diode



520nm, 30mW Single Mode Laser Diode, Coaxial Package, PM Fiber-Coupled

- 520nm, 30mw Single Mode Output
- 3µm PM Fiber, NA 0.12
- FC/PC Fiber Connector
- Coaxial Package with Mounting Bracket



Laser Lab Source a division of Research Lab Source Corporation

www.LaserLabSource.com phone: 800-887-5065 670 South Ferguson Bozeman, MT 59718






520NM-30MW-PM Overview

This single mode green laser diode is offered in a coaxial package with a polarization maintaining fiber pigtail. This laser is coupled to 3µm PM fiber, NA 0.12, and terminated with an FC/PC connector. Other connector options are available; inquire for options and details. These high stability fiber coupled laser diodes are designed and manufactured to meet the most demanding R&D and industrial applications. Proprietary design, packaging, and fiber coupling processes produce laser diodes with very high stability and low noise. Each laser diode is subject to extensive testing and burn-in before shipment to ensure the highest possible levels of quality and long term reliability.

Proven Laser Diode Expertise

These high stability fiber coupled laser diodes are designed and manufactured to meet the most demanding R&D and industrial applications.

Proprietary design, packaging, and fiber coupling processes produce laser diodes with very high stability and low noise. Each laser diode is subject to extensive testing and burn-in before shipment to ensure the highest possible levels of quality and long term reliability.

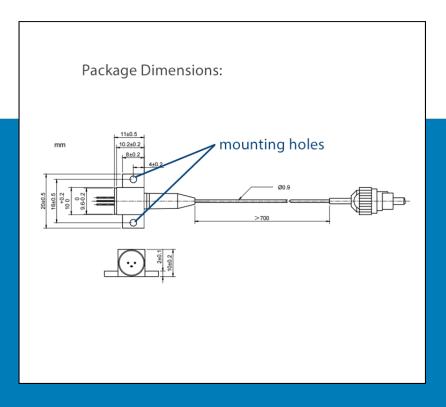





OPTICAL SPECIFICATIONS AT 25°C

- Center Wavelength: 520 nm ±10 nm
- Output Power: 30 mW
- Wavelength Temperature Coefficient: 0.05 nm/°C
- Spectral Width (FWHM): 2.0 nm
- Beam Type: Gaussian
- Polarization Extinction Ratio: 15 dB

ELECTRICAL SPECIFICATIONS AT 25°C

- Operating Current: 270 mA
- Threshold Current: 65 mA
- Operating Voltage: 7.0 V

PACKAGE AND FIBER SPECIFICATIONS

- Coaxial Package with Mounting Bracket
- Fiber Type: Polarization Maintaining, Single Mode
- Fiber Connector: FC/PC
- Slow Axis Aligned to the Key of the FC Connector
- Fiber Core Diameter: 3 µm
- Fiber NA: 0.12

WORLD LEADING PRODUCTS FOR LASER SCIENTISTS AND ENGINEERS