

PD4B-40-P40-4G-K

OVERVIEW

PD4B-40-P40-4G-K is the InGaAs PIN photodiode coupled to an optical fiber and packaged into a hermetic case.

MAIN FEATURES

- Maximum optical input power: 40 mW
- Bandwidth: 4 GHz
- Typical responsivity: 1.0 A/W at 1550 nm
- Package types: coaxial with or without bracket
- Low back reflection, return loss RL > 40 dB
- Low dark current 0.02 nA

APPLICATIONS

- Optical fiber communication systems

ORDERING INFORMATION

PD4B-40-P40-4G-K-X-X-7-X-X-X

Optical matching

R40: back reflection -40 dB (SM1 and SM3 fiber)

Case type

COAX: compact coaxial

COAXB: compact coaxial with double-sided bracket

Fiber type

SMT: SM, [Corning Titania-Clad](#), furcation tubing Ø0.9 mm, ultrasmall bending radius 2.5 mm

SM1: SM, G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing Ø0.9 mm or **BSM1** Ø0.25mm

SM3: SM, G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing Ø0.9 mm or **BSM3** Ø0.25mm

Other type: on request

Connector type

FA: FC/APC (SM1, SM3, SMT)

FU: FC/UPC (SM1, SM3, SMT)

SA: SC/APC (SM1)

SU: SC/UPC (SM1)

N: no connector

Other type: on request

Fiber length

0.5: 500+/-50 mm

1.0: 1000+/-100 mm

Other length: on request

PD4B-40-P40-4G-K

ABSOLUTE MAXIMUM RATINGS





Parameter		Value	Unit	Conditions
Maximum optical input power	P_{max}	40	mW	
Reverse voltage	V_R	20	V	
Forward current	I_F	40	mA	
Operating temperature	T_{op}	-40 ÷ +85	°C	
Storage temperature	T_{stg}	-40 ÷ +85	°C	
Soldering temperature	T_{sold}	260	°C	Max. 5 seconds

ELECTRICAL-OPTICAL CHARACTERISTICS (T = 25 °C)


Parameter			Min	Typ	Max	Unit	Conditions
Responsivity	R40	R	0.80	0.85		A/W	$\lambda = 1550 \text{ nm}$
Return loss	R40	RL	37	40		dB	
Operating voltage		V_{op}		3	5		
Dark current		I_d		0.02	0.08	nA	$V_R = 3 \text{ V}$
Total capacitance		C_t		0.55	0.80	pF	$V_R = 3 \text{ V}, f = 1 \text{ MHz}$
Chip capacitance		C_{chip}		0.35	0.50	pF	$V_R = 3 \text{ V}, f = 1 \text{ MHz}$
Bandwidth		BW		4		GHz	$P_i = -10 \text{ dBm}, V_R = 3 \text{ V}, R_L = 50 \Omega,$ Small signal modulation

PD4B-40-P40-4G-K

CHARACTERISTICS (T = 25 °C)

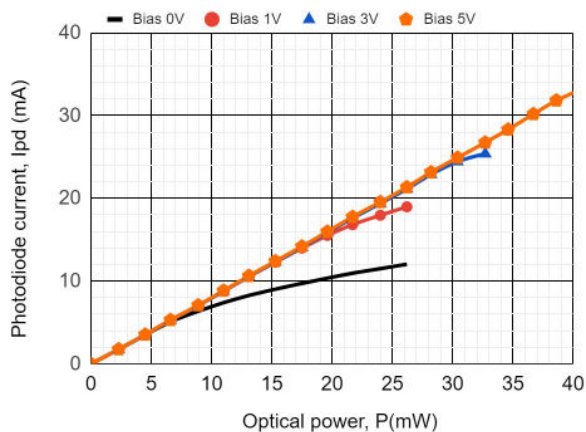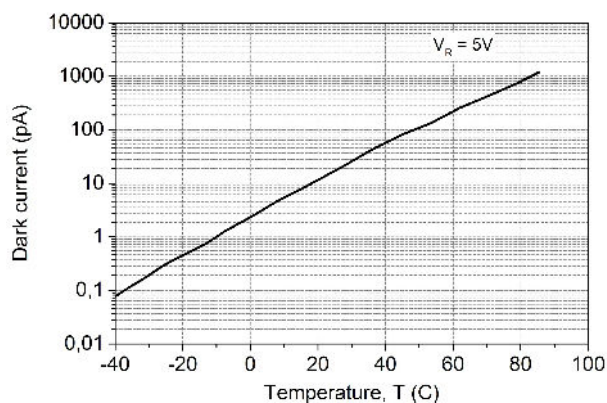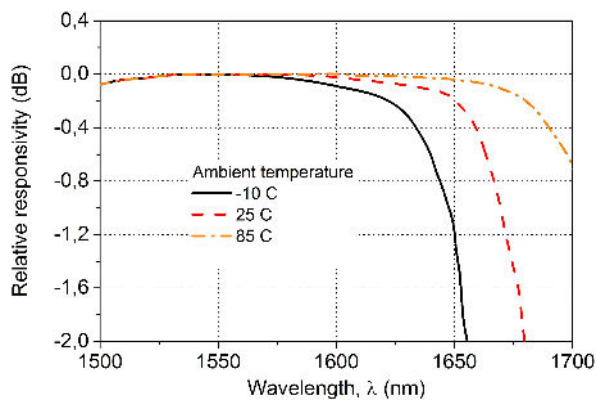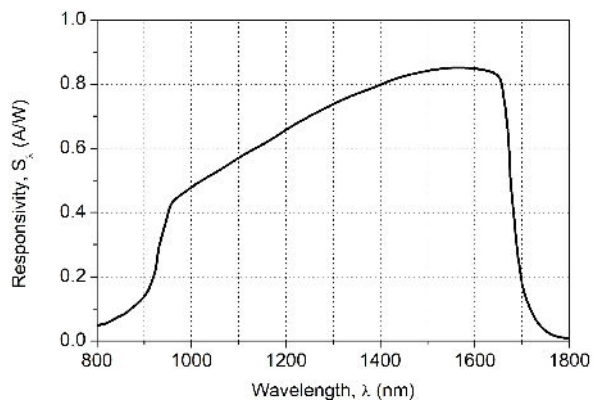


PD4B-40-P40-4G-K

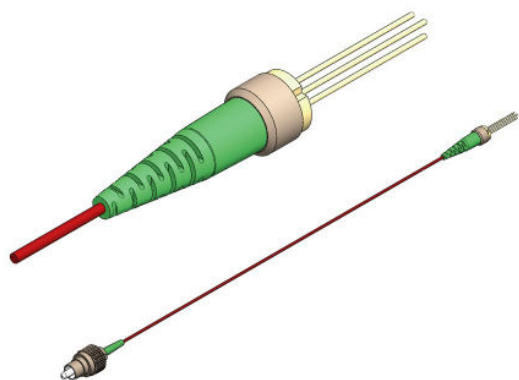


COAX




BACK VIEW



PINOUT
#7




Download more information

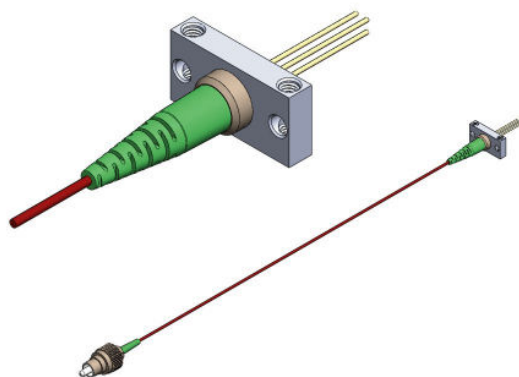


COAXB



BACK VIEW



PINOUT
#7



Download more information



PD4B-40-P40-4G-K

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

Safety and handling cautions

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximal ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

Conflict Minerals Policy Statement

LD4B, UAB achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

RoHS Compliance Statement

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LD4B, UAB hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

REACH Compliance Statement

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LD4B, UAB hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LD4B, UAB does not manufacture or import any substances or preparations as defined under REACH.